


# AMCX-FDX-2

2 Port 10/100/1000Mbit/s  
AFDX®/ARINC664P7  
Test, Simulator and Monitor  
Module for PMC

Data  
Sheet

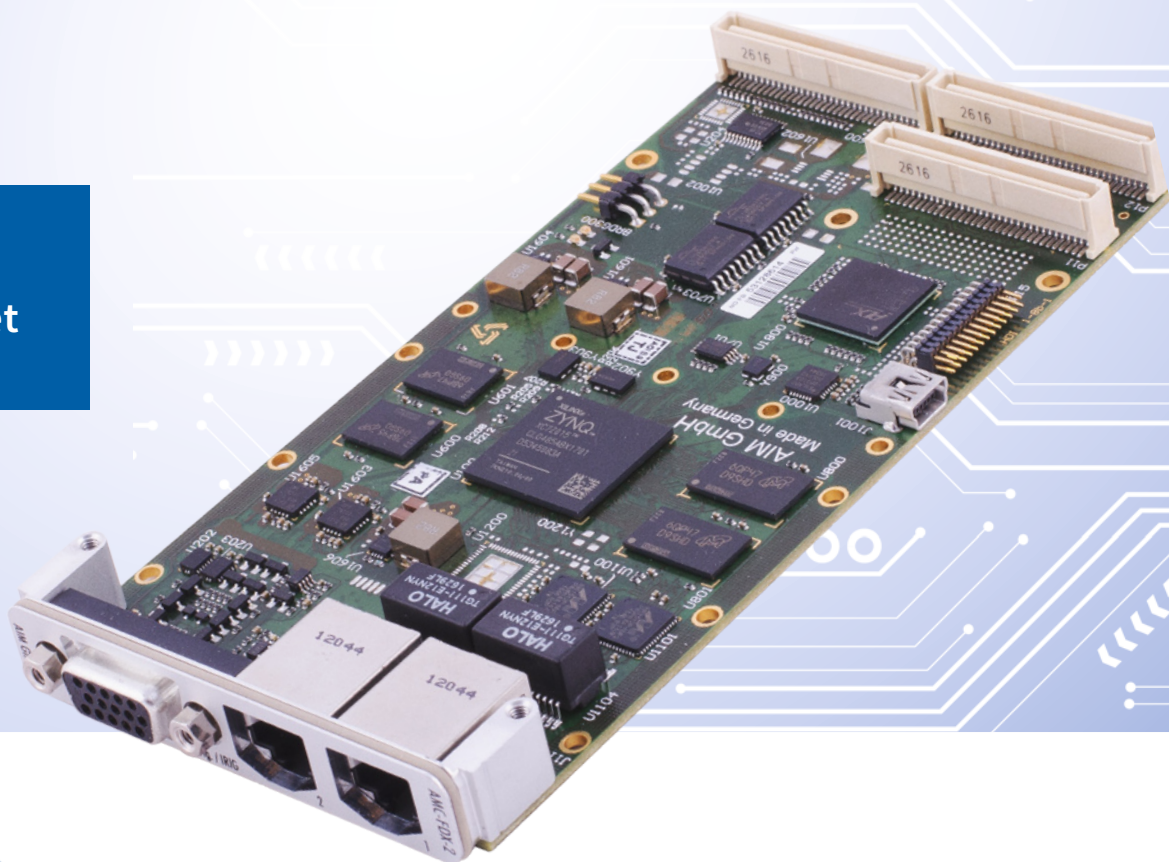

# AMCX-FDX-2

## General Features


The AMCX-FDX-2 is AIM's new high performance ► **PMC module** offering full function test, simulation, monitoring and analyzer functions for AFDX®/ARINC664P7 (Avionics Full Duplex Switched Ethernet) networks. Versions available for both Airbus and Boeing variants of the ARINC664P7.

The board supports the Boeing ARINC664 extensions for EDE at the hardware interface layer with field proven real time simulation of EDE subscribers to meet all parts and multiple revisions of the EDE specifications. Its unique onboard processing capability, memory resources, customized AFDX® MACs and IRIG-B time code decoder/generator gives ► **AFDX®** users a comprehensive feature set for the most demanding AFDX® applications.

The AMCX-FDX-2 module provides two AFDX® ports being configured as two single or one dual redundant port each implementing a 10/100/1000Mbit/s full duplex Ethernet interface. Ports can operate concurrently in traffic simulator or receiver/monitor modes with support for AFDX® port related frame statistics. Virtual Link (VL) packet capturing and monitoring features are complemented with powerful triggering and filtering capabilities. An integrated TAP mode enables analyzing network traffic in-line, with all onboard and PBA.pro features between two attached Ethernet devices.

The extensive memory resources onboard allow to implement large receive buffers and complex transmit scenarios onboard. An AFDX®/ARINC664P7 specific Physical Bus Interface implements two full duplex ports for connection to AFDX® networks.

AMCX-FDX-2 Block Diagram

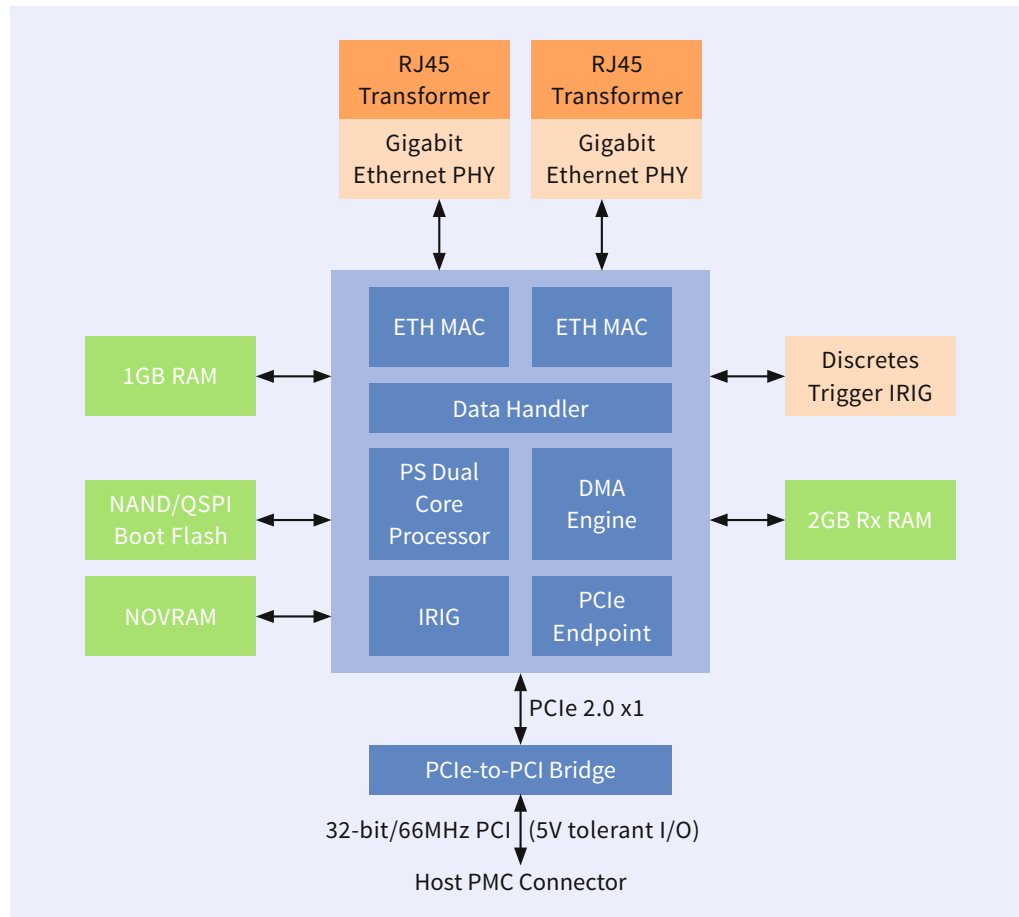

The AMCX-FDX-2 module is available with the optional ► **PBA.pro** analyzer software package for Windows and Linux.

- 10/100/1000Mbit/s Ethernet compliant Frontend
- Designed for Applications such as:
  - Test and Verification of End Systems
  - Switch Testing
  - Monitoring of Traffic between End Systems and Switch
  - Inter Switch Traffic Analysis
  - Multi Stream High Level System Integration
- Programmable Ports – Traffic Simulator and Receiver/Monitor Concurrently
- Synchronized Timing across Multiple Modules
- Driver Software for Windows and Linux

## Traffic Generation

The AMCX-FDX-2 provides real time traffic generation on both ports concurrently. Transmitter operation allows users to fully programme all fields of the AFDX® frame

including the Virtual Link identifier, MAC source address, IP structure, UDP structure, payload and sequence number. Multiple modes of transmit sequencing are supported, these being generic/replay and UDP port oriented shaped transmissions. Users can program payload data with user defined or fixed data. Inserting the time tag in the payload data provides an elegant solution to measure frame transmit delays through the network. Synchronization of transmissions across multiple ports is achieved by using strobe inputs/outputs.

- Programmable Timing and Sequencing of Frames
- Physical Error Injection – CRC, Gap, Size, Alignment
- Logical Error Injection on Layers 2, 3, 4
- Timing Error Injection – Violation of Bandwidth Allocation Gap (BAG)
- Autonomous Dynamic Data Generation
- UDP Port Simulation with Traffic Shaping and Sequence Numbering
- Onboard Support for Sampling and Queuing Ports



## UDP/VL Receive Mode

The ► **AMCX-FDX-2** module ports can be configured to work in UDP/VL oriented receive mode. In this mode each UDP port has a separate buffer queue. Received frames are stored with frame headers containing time tag and status information. Frame header information can be stored and payload data optionally discarded for the testing of switches and the complete network. With the traffic shaping verification enabled, any violations are reported as errors in related frame headers.

- VL oriented Filtering
- Second Level Filtering on Generic Frame Parameter
- Time Stamping of Received Packets with extended IRIG-B Time Code
- Physical Error Detection, Frame Level – CRC, Gap, Size and Alignment
- AFDX® Specific Error Detection
- Traffic Shaping Verification
- Verification of MAC, IP and UDP Headers
- VL oriented Integrity Checking

## Chronological Receive Mode (Monitor Mode)

The AMCX-FDX-2 module ports can be configured in chronological receive mode to sequentially receive frames and store them in a circular buffer. The payload data can be discarded to optimize the use of the buffer for frame capture and analysis. Powerful filtering, triggering, complex triggering and capture modes allows users to select only the frames, data and errors of interest. Monitor mode also provides activity monitoring and statistics for each VL recorded by the AMCX-FDX-2 module. The interface modules report the number of frames received and the number of errors detected globally and in VL oriented format.

- VL orientated Receive and Filtering
- Second Level Filtering on Generic Frame Parameters
- Chronological Monitor with Time Stamping
- Massive onboard Monitor Buffer
- Inter Frame Gap Time Measurements with 8ns Resolution
- Comprehensive Triggering/Filtering/Capturing
- Programmable Data Capture Modes – Trace after Trigger and Recording
- Physical Error Detection – CRC, Gap, Size and Alignment
- AFDX® specific Error Detection

## TAP Mode

The AMCX-FDX-2 can operate in TAP mode in all network speeds. This allows to analyze the network traffic between two attached network devices. Inter-message-timing will not be changed in this operational mode and network data will not be modified ensuring full operation of attached ports.

## Time Synchronization

An onboard IRIG-B time code decoder and generator allows synchronization of multiple AFDX® ports using multiple AMCX-FDX-2 modules. Modules can be synchronized using an external IRIG-B time source or the onboard time code generator of one module as the reference for accurate correlation of data across multiple AFDX® ports.

## Physical Bus Interface

The AMCX-FDX-2 modules provide two AFDX® ports which can be used as two single channels or as one dual redundant channel AFDX® specific physical bus interface.

- Customized Media Access Controllers (MAC's) implemented in FPGA (► **SoC**), optimized for AFDX®/ARINC664P7
- 3GByte DDR3 Memory for System, Receiver and Transmitter Buffer
- Physical Interface and Magnetics (COTS)
- 8-Socket Network Interface Connectors – RJ45
- Trigger, Strobe and Time Code I/O Connector

## Driver Software Support

The driver software is supplied with the AMCX-FDX-2 module. A full functional Application Programming Interface (API) is provided compatible with Windows and Linux. Host applications can be written in C/C++ and Python.

A LabView/VI application interface as well as LabViewRT drivers are provided.

## Technical Data

### System Interface

PCI Rev. 3.0 compatible, 3.3V (5V tolerant)  
I/O, 66MHz, 32-bit

### Processors

Dual Core Processing System, integrated  
in SoC Device

### Memory

1GByte DDR3 Processing System RAM  
2GByte DDR3 MAC Receiver RAM

### Encoder/Decoder

2 AFDX® specific Ethernet MAC's, integrated  
in SoC Device;  
Inter Frame Gap Generation and  
Measurement with 8ns Resolution  
(1000Mbit/s Operation)

### Time Tagging

46-bit absolute IRIG-B Time with  
100ns Resolution;  
Inter Frame Gap Generation and  
Measurement with 8ns Resolution

### Physical Bus Interface (PBI)

2 full duplex AFDX® Ports configurable to  
1 dual-redundant AFDX® Port or to 1 TAP Port

## Ordering Information

### AMCX-FDX-2

2 Port, 10/100/1000Mbit/s  
AFDX®/ARINC664P7 PMC Module:  
Traffic Simulator, Receiver and Chrono-  
logical Monitor, Integrated Tap Mode,  
IRIG-B Time Decoder, 3GB DDR3 RAM  
Includes Driver Software for Windows,  
LabVIEW VI's, LabVIEW RT, Linux  
Note: Connector identical to AMC-FDX-2,  
API Compatibility to AMC-FDX-2 from  
BSP V19.0.0

### AMCX-FDX-2-G

2 Port, 10/100/1000Mbit/s  
AFDX®/ARINC664P7 PMC Module:  
Generic TX/RX Function Only,  
Integrated Tap Mode, IRIG-B Time  
Decoder, 3GB DDR3 RAM

Includes Driver Software for Windows,  
LabVIEW VI's, LabVIEW RT, Linux  
Note: Connector identical to  
AMC-FDX-2-G, API Compatibility to  
AMC-FDX-2-G from BSP V19.0.0

### AMCX-FDX-2B

2 Port, 10/100/1000Mbit/s  
AFDX®/ARINC664P7 PMC Module:  
Traffic Simulator, Receiver and Chrono-  
logical Monitor, Integrated Tap Mode,  
IRIG-B Time Decoder, 3GB DDR3 RAM  
Including Boeing EDE Specific Extensions  
Includes Driver Software for Windows,  
LabVIEW VI's, LabVIEW RT, Linux  
Note: Connector identical to  
AMC-FDX-2B, API Compatibility to  
AMC-FDX-2B from BSP V19.0.0

### Connectors

2 x 8 way RJ45 Connectors, 1 per AFDX®  
Port; 1 x 15 way D-Sub Connector (female)  
for Time Code, Discrete I/O and Trigger I/O;  
PMC Connector P11 and P12 for 32-bit  
PCI Interface

### Dimensions

Single Width XMC Standard: 149mm x  
74mm

### Power Consumption

Typical 4.7W (10/100Mbit/s)/  
5.5W (1000Mbit/s) (operating)

### Operating Temp. Range

Standard: 0°C to +55°C ambient  
Extended: -20°C to +75°C ambient on Request

### Storage Temp. Range

-40°C to +85°C ambient

### Humidity

0 to 95% non-condensing

Versions available for both Airbus and  
Boeing variants of the ARINC664P7

\* AFDX® is a registered trademark of Airbus

### ► AIM Office Contacts:

#### AIM GmbH

Sasbacher Str. 2  
D-79111 Freiburg / Germany  
Phone +49 (0)761 4 52 29-0  
Fax +49 (0)761 4 52 29-33  
sales@aim-online.com

#### AIM GmbH – Munich Sales Office

Terofalstr. 23a  
D-80689 München / Germany  
Phone +49 (0)89 70 92 92-92  
Fax +49 (0)89 70 92 92-94  
salesgermany@aim-online.com

#### AIM UK Office

Cressex Enterprise Centre, Lincoln Rd.  
High Wycombe, Bucks. HP12 3RB / UK  
Phone +44 (0)1494-446844  
Fax +44 (0)1494-449324  
salesuk@aim-online.com

#### AIM USA LLC

Seven Neshaminy Interplex  
Suite 211 Trevoise, PA 19053  
Phone 267-982-2600  
Fax 215-645-1580  
sales@aim-online.us