




Avionics Databus
Solutions

ACCx-1

Compact PCI Express (3U)
Generic Carrier Card for XMC
(ANSI/VITA 42.3 Mezzanine Card) Modules

Data
Sheet

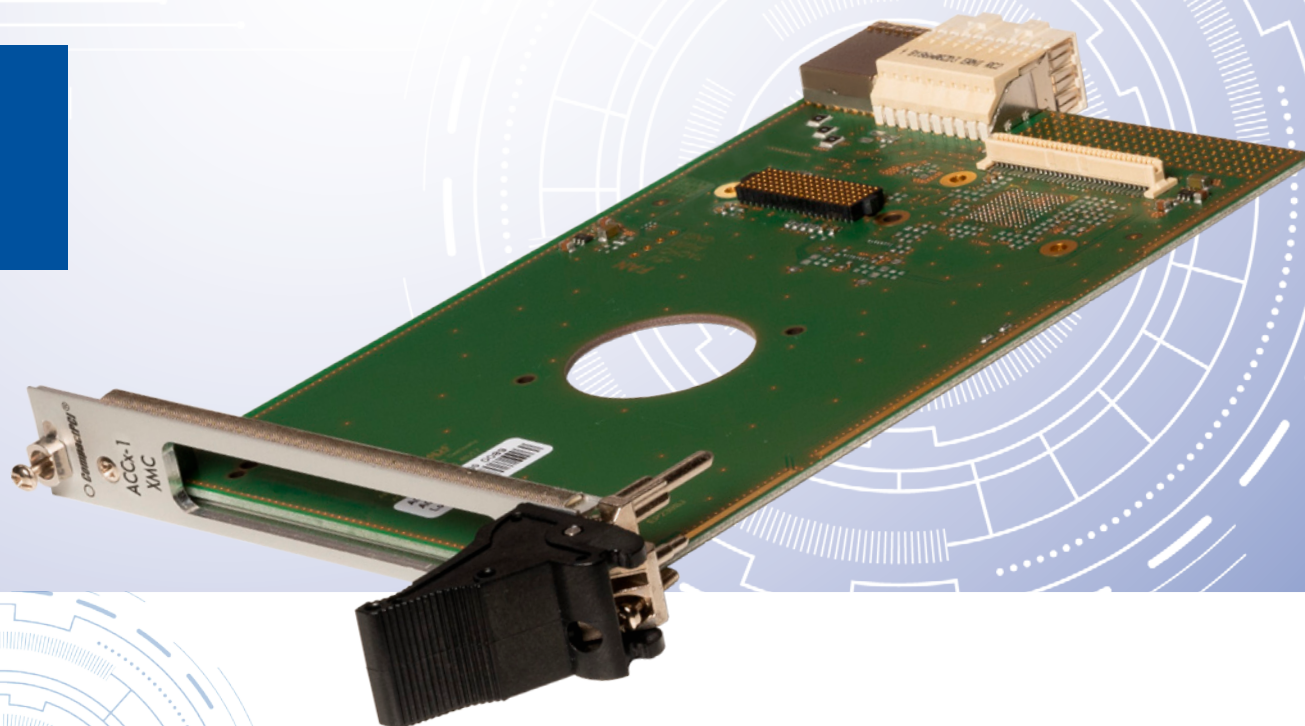

General Features

The ACCx-1 is a single slot, single height (3U) ► **Compact PCI Express** module with one XMC mezzanine card slot to plug in a standard XMC module.


The ACCx-1 fulfills the requirements of the Compact PCI Express specification as well as the requirements of the PCI Express standard. The XMC slot is in conformance with the ANSI/VITA 42.x standard physical and environmental layers for switched fabric mezzanine card compliant with ANSI/VITA 42.3 mezzanine card standard.

XMC Module Interface

The ACCx-1 is designed to plug all standard VITA 42.3 XMC modules and support bus operation of up to 5GBit/s. The following block diagram gives an overview of the ACCx-1 carrier.

Key Features

- Easily configured with any AIM XMC
 - **Databus Module:** AFDX®/ARINC664P7, ARINC429, MIL-STD-1553 or any standard 3rd party VITA 42.3 compliant XMC Module
- Gen 2 PCI Express Bus Operation of 5GB/s Data Rate
- 3U Compact PCI Form Factor
- Fully compliant to Compact PCI Express Specification (Release 2.0)
- XMC standard for VITA 42.0 and VITA 42.3-2006

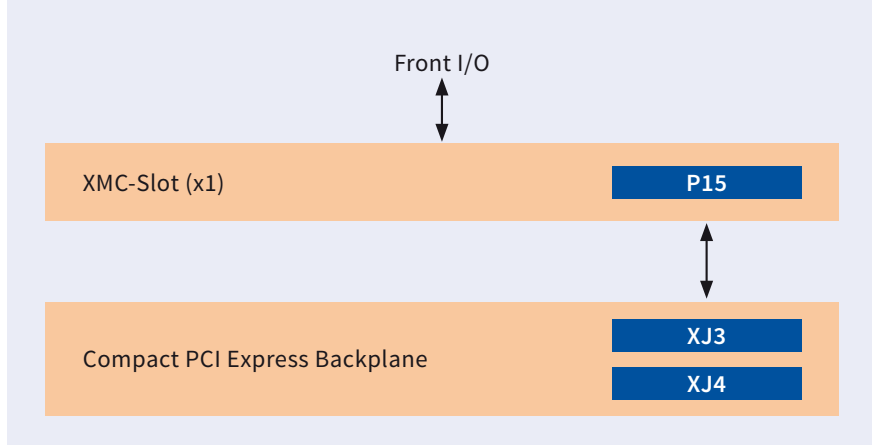

ACCx-1 Block Diagram

Technical Data

Compact PCI Express Interface*

- Fully compliant to Compact PCI Express Standard (Release 2.0)
- Single Lane PCI-Express Link, with up to 5GB/s Bandwidth

XMC Interface*

- Provides one XMC Slot
- Fully compliant to PCI Mezzanine Card Standardization IEEE1386.1/Draft 2.4
- Fully compliant to VITA XMC Standard 42.0
- Fully compliant to VITA XMC PCI Express Protocol Layer Standard 42.3-2006
- Single Lane PCI Express Bus Operation up to 5GB/s Data Rate

Connectors

- Compact PCI Express:
 - XJ3 High-Speed Advanced Differential Fabric (ADF) Connector for PXle/cPCIe Bus Interface;
 - XJ4 (eHM) Connector for Backplane Power Supply
- XMC: XMC Connector P15 for Single Lane 5GB/s PCI Express Bus

Front Panel

XMC-Bezel standard Breakout Panel

Dimensions

100mm x 160mm

Power Consumption

< 0.1W: (excludes XMC-Module Power Consumption)

Operating Temp. Range

0°C to +70°C standard Operating Range
-40°C to +85°C extended Temperature Range
-40°C to +85°C Storage Range

Humidity

5 to 95% non-condensing

Ordering Information

ACCx-1

cPCIe (3U) carrier module with 1 XMC slot

* Geographical addressing is not supported

AIM Office Contacts:

AIM GmbH

Sasbacher Str. 2
D-79111 Freiburg / Germany
Phone +49 (0)761 4 52 29-0
Fax +49 (0)761 4 52 29-33
sales@aim-online.com

AIM GmbH – Munich Sales Office

Terofalstr. 23a
D-80689 München / Germany
Phone +49 (0)89 70 92 92-92
Fax +49 (0)89 70 92 92-94
salesgermany@aim-online.com

AIM UK Office

Cressex Enterprise Centre, Lincoln Rd.
High Wycombe, Bucks. HP12 3RB / UK
Phone +44 (0)1494-446844
Fax +44 (0)1494-449324
salesuk@aim-online.com

AIM USA LLC

Seven Neshaminy Interplex
Suite 211 Trevoise, PA 19053
Phone 267-982-2600
Fax 215-645-1580
salesusa@aim-online.com